Honeywell | Filter

MiniPlus FF06

Rinsable fine filter

APPLICATION

Rinsable MiniPlus FF06 fine filters ensure a continous supply of filtered water. The fine filter prevents the ingress of foreign bodies, for example rust particles, strands of hemp and grains of sand and thus reduces the probability of corrosion. Sediment collected at the bottom of the filter bowl can simply be removed by rinsing the filter.

Compact in size, these filters were designed to fit where space is limited.

APPROVALS

DVGW

SPECIAL FEATURES

- Simple assembly
- Filtered water supplied even during reverse rinsing
- Shock resistant clear synthetic material filter bowl enables easy checking of filter contamination
- Filter and complete filter bowl are replaceable
- Body with female and male threads
- All materials are ACS approved
- All materials are KTW approved
- Approved by TÜV LGA for low noise, Group 1 without limitations



TECHNICAL DATA

Media	
Medium:	Drinking water
Connections/Sizes	
Connection sizes:	1/2" - 11/4"
Pressure values	
Max. operating pressure:	16.0 bar
Operating temperatures	
Max. operating temperature	40 °C
medium:	
Specifications	
Installation position:	Horizontal with filter bowl
	downwards

Note: The filter is constructed for drinking water installations. In case of a process water application the filter has to be proven individually.

CONSTRUCTION

Overview		Components	Materials
	1	Threaded connections (option AA)	Brass
	2	Housing with female and male threads, without threaded connection	Dezincification resistant pressed brass
T. (3)	3	Fine filter in clear filter bowl	Stainless steel, shock- resistant, transparent synthetic material filter bowl
	4	Ball valve	Brass (Ball Valve body), Stainless steel (ball), Plastic (handle)
		Not depicted components	
- 4		Double wring wrench	Plastic

METHOD OF OPERATION

The fine filter is composed of a body and a rinsable fine filter insert.

During normal operation, water flows through the filter mesh to the body outlet. To rinse the filter, the ball valve is opened which discharges the dirt particles. A continous supply of filtered water is available also during the rinse cycle.

TRANSPORTATION AND STORAGE

Keep parts in their original packaging and unpack them shortly before use.

The following parameters apply during transportation and storage:

Parameter	Value
Environment:	clean, dry and dust free
Min. ambient temperature:	5°C
Max. ambient temperature:	55 °C
Min. ambient relative humidity:	25 % *
Max. ambient relative humidity	85 % *


^{*}non condensing

Installation Example

INSTALLATION GUIDELINES

Setup requirements

- Install in horizontal pipework with filter bowl downwards
 - This position ensures optimum filter efficiency
- Install shut-off valves
- These filters are armatures which need to be maintained regularly
- Ensure good access
 - Degree of contamination can be easily seen with clear filter bowl
 - Simplifies maintenance and inspection
- The installation location should be protected against frost
- Related to the EN 806-2 it is recommended to install the filter immediately after the water meter
- In order to avoid flooding, it is recommended to arrange a permanent, professionally dimensioned wastewater connection

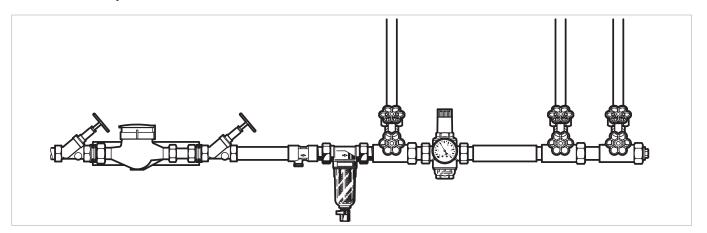


TECHNICAL CHARACTERISTICS


kvs-Values

Connection sizes:	15	20	25	32
k _{vs} -value (m ³ /h):	4.0	5.8	10.4	10.4

Pressure drop characteristics

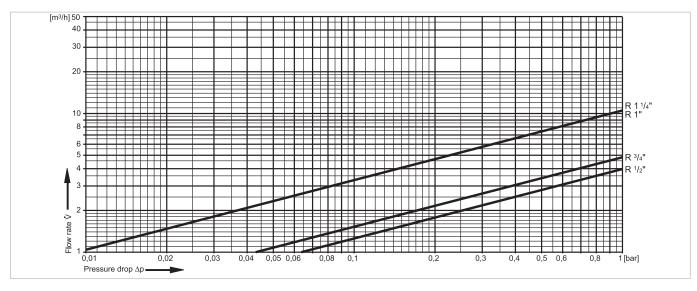

DIMENSIONS

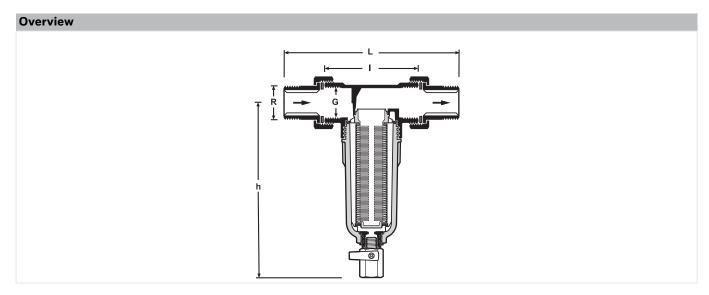

Parameter			Val	ues	
Connection sizes:	R	1/2"	3/4"	1"	11/4"
Internal threads:	G	1/2"	3/4"	1"	-
Weight:	kg	0.7	1.0	1.3	1.5
Dimensions:	L	140	158	179	197
	1	80	90	100	105
	h	158	180	180	180
Flow value at Δp =0.5 bar:	m ³ /h	1.27	2.27	7.0	7.0
DVGW registration number:		NW-9301	CM0399	_	-

Note: All dimensions in mm unless stated otherwise.

ORDERING INFORMATION

The following tables contain all the information you need to make an order of an item of your choice. When ordering, please always state the type, the ordering or the part number.

Options

The valve is available in the following sizes: $^{1}/_{2}$ ", $^{3}/_{4}$ ", 1 " and $^{1}/_{4}$ ".

- standard
- not available

		FF06AA	FF06EA
Connection type:	Threaded male connections, filter mesh size 100 μm	•	-
	Without connections, filter mesh size 100 µm	-	•

Note: ... = space holder for connection size

Note: Ordering number example for 1" and type AA valve: FF06-1AA

Accessories

	Descriptio	n	Dimension	Part No.
- A	VST06B	Connection set		·
		Solder connections		
			1/2"	VST06-1/2B
9			3/4"	VST06-3/4B
0.000			1"	VST06-1B
			11/4"	VST06-11/4B
	ZR06K	Double ring wrench		
		For removing filter bowl (no fig.)		
			1/2" - 11/4"	ZR06K

Spare Parts

MiniPlus FF06 Fine Filters from 1997 onwards

	2 O-ring set for	owl with sieve 100 μ m and $1/2$ " $3/4$ " - $1^{1}/4$ " r mesh carrier (10 pcs.) $1/2$ " $3/4$ " - $1^{1}/4$ " t sieve (5 pcs.) $1/2$ " $3/4$ " - $1^{1}/4$ " $1/2$ " $1/2$ "	d mesh carrier KF06-1/2A KF06-1A 0903127 0903128 AS06-1/2A AS06-1A
5	3 Replacement 100 μm 100 μm 50 μm	$3/4$ " - $1^{1}/4$ " r mesh carrier (10 pcs.) $1/2$ " $3/4$ " - $1^{1}/4$ " t sieve (5 pcs.) $1/2$ " $3/4$ " - $1^{1}/4$ "	KF06-1A 0903127 0903128 AS06-1/2A
5	3 Replacement 100 μm 100 μm 50 μm	r mesh carrier (10 pcs.) $^{1/2}"$ $^{3/4}" - 1^{1/4}"$ t sieve (5 pcs.) $^{1/2}"$ $^{3/4}" - 1^{1/4}"$	0903127 0903128 AS06-1/2A
5	3 Replacement 100 μm 100 μm 50 μm	$\frac{1}{2}$ " $3/4$ " - $1^{1}/4$ " t sieve (5 pcs.) $\frac{1}{2}$ " $3/4$ " - $1^{1}/4$ "	0903128 AS06-1/2A
	100 μm 100 μm 50 μm	3/4" - 1 ¹ /4" t sieve (5 pcs.) 1/2" 3/4" - 1 ¹ /4"	0903128 AS06-1/2A
	100 μm 100 μm 50 μm	t sieve (5 pcs.) 1/2"	AS06-1/2A
	100 μm 100 μm 50 μm	¹ / ₂ " ³ / ₄ " - 1 ¹ / ₄ "	
	100 µm 50 µm	3/4" - 11/4"	
	50 µ m		AS06-1A
		1/2"	
	50 µ m	_	AS06-1/2C
		3/4" - 11/4"	ASO6-1C
	4 O-ring set for	r filter bowl (10 pcs.)	
		1/2"	0901246
(2)		3/4" - 11/4"	0901499
	5 Connection s	et threaded connection	
		1/2"	VST06-1/2A
$\bigcirc \bigcirc $		3/4"	VST06-3/4A
		1"	VST06-1A
		11/4"	VST06-11/4A

Environmental & Energy Solutions

Honeywell GmbH Hardhofweg 74821 MOSBACH GERMANY

Phone: (49) 6261 810 Fax: (49) 6261 81309

http://ecc.emea.honeywell.com

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Z.A. La Pièce 16, 1180 Rolle, Switzerland by its Authorised Representative Honeywell GmbH ENOH-1115GE23 R1116 Subject to change © 2016 Honeywell GmbH

